


QSC-100 RoHS

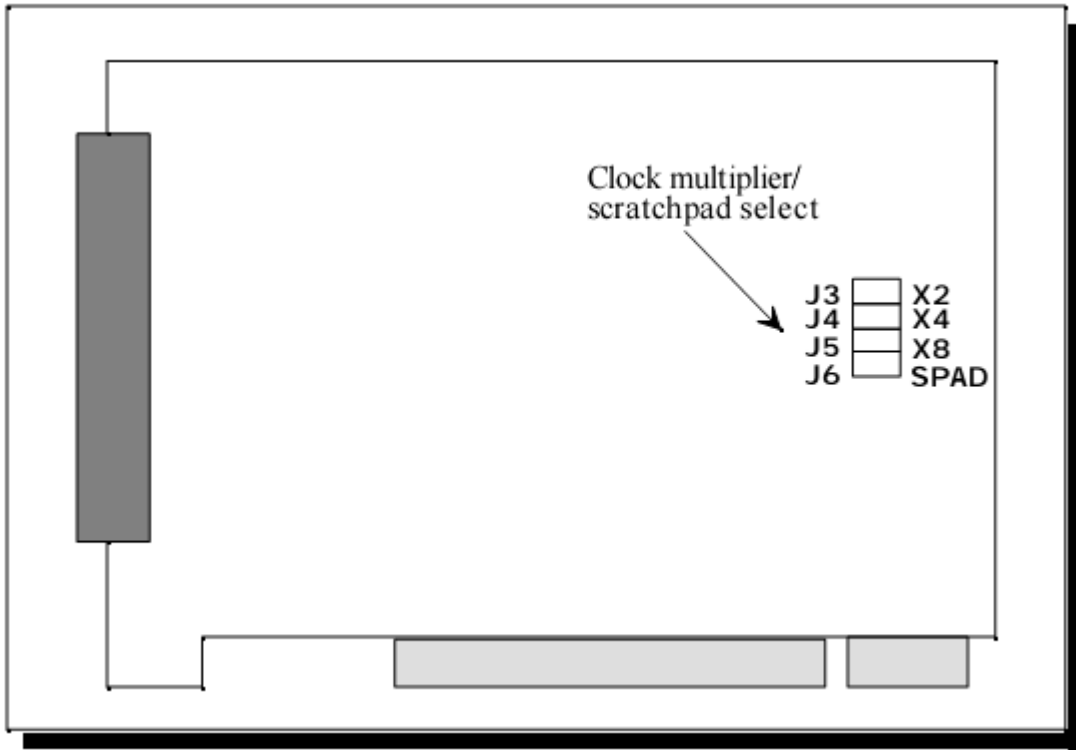

QSC-100 OLD

The connector for the new QSC-100 has changed from the old card.
 The new connector is a D-44 connector instead of the previously used D-37.
 Pinout differences are shown below:

RS-232 Signal	Port 1		Port 2		Port 3		Port 4	
	D-44	D-9	D-44	D-9	D-44	D-9	D-44	D-9
TxD	13	3	10	3	6	3	2	3
RxD	42	2	39	2	35	2	31	2
RTS	14	7	11	7	7	7	3	7
CTS	43	8	40	8	36	8	32	8
DTR	28	4	24	4	21	4	17	4
DSR	27	6	23	6	20	6	16	6
DCD	44	1	41	1	37	1	33	1
RI	29	9	25	9	22	9	18	9
GND	19	5	8	5	26	5	30	5

QSC-100 RoHS Connections

RS-232 Signal	Port 1		Port 2		Port 3		Port 4	
	D-37	D-25	D-37	D-25	D-37	D-25	D-37	D-25
TxD	24	2	10	2	33	2	19	2
RxD	5	3	28	3	14	3	37	3
RTS	23	4	9	4	32	4	18	4
CTS	4	5	27	5	13	5	36	5
DTR	21	20	7	20	30	20	16	20
DSR	22	6	8	6	31	6	17	6
DCD	2	8	25	8	11	8	34	8
RI	20	22	6	22	29	22	15	22
GND	3	7	26	7	12	7	35	7

QSC -100 Old Style Connections

The new QSC-100 comes with a D-25 cable, however, an optional D-9 cable is available.

Jumpers J3-J6 labels have been removed on the new card.
On the new card, the top selection is SPAD, and then moving downward: X8, X4, and X2.